


# Beachflag

## Assembly instruction

### Important note for beachflags:

Due to the lightweight construction beachflags are not suitable for durable outdoor use. Beachflags are made exclusively for short term use like as on sport events, trade shows, events etc. In order to avoid damages you shouldn't expose the beachflags to strong winds or storms !!

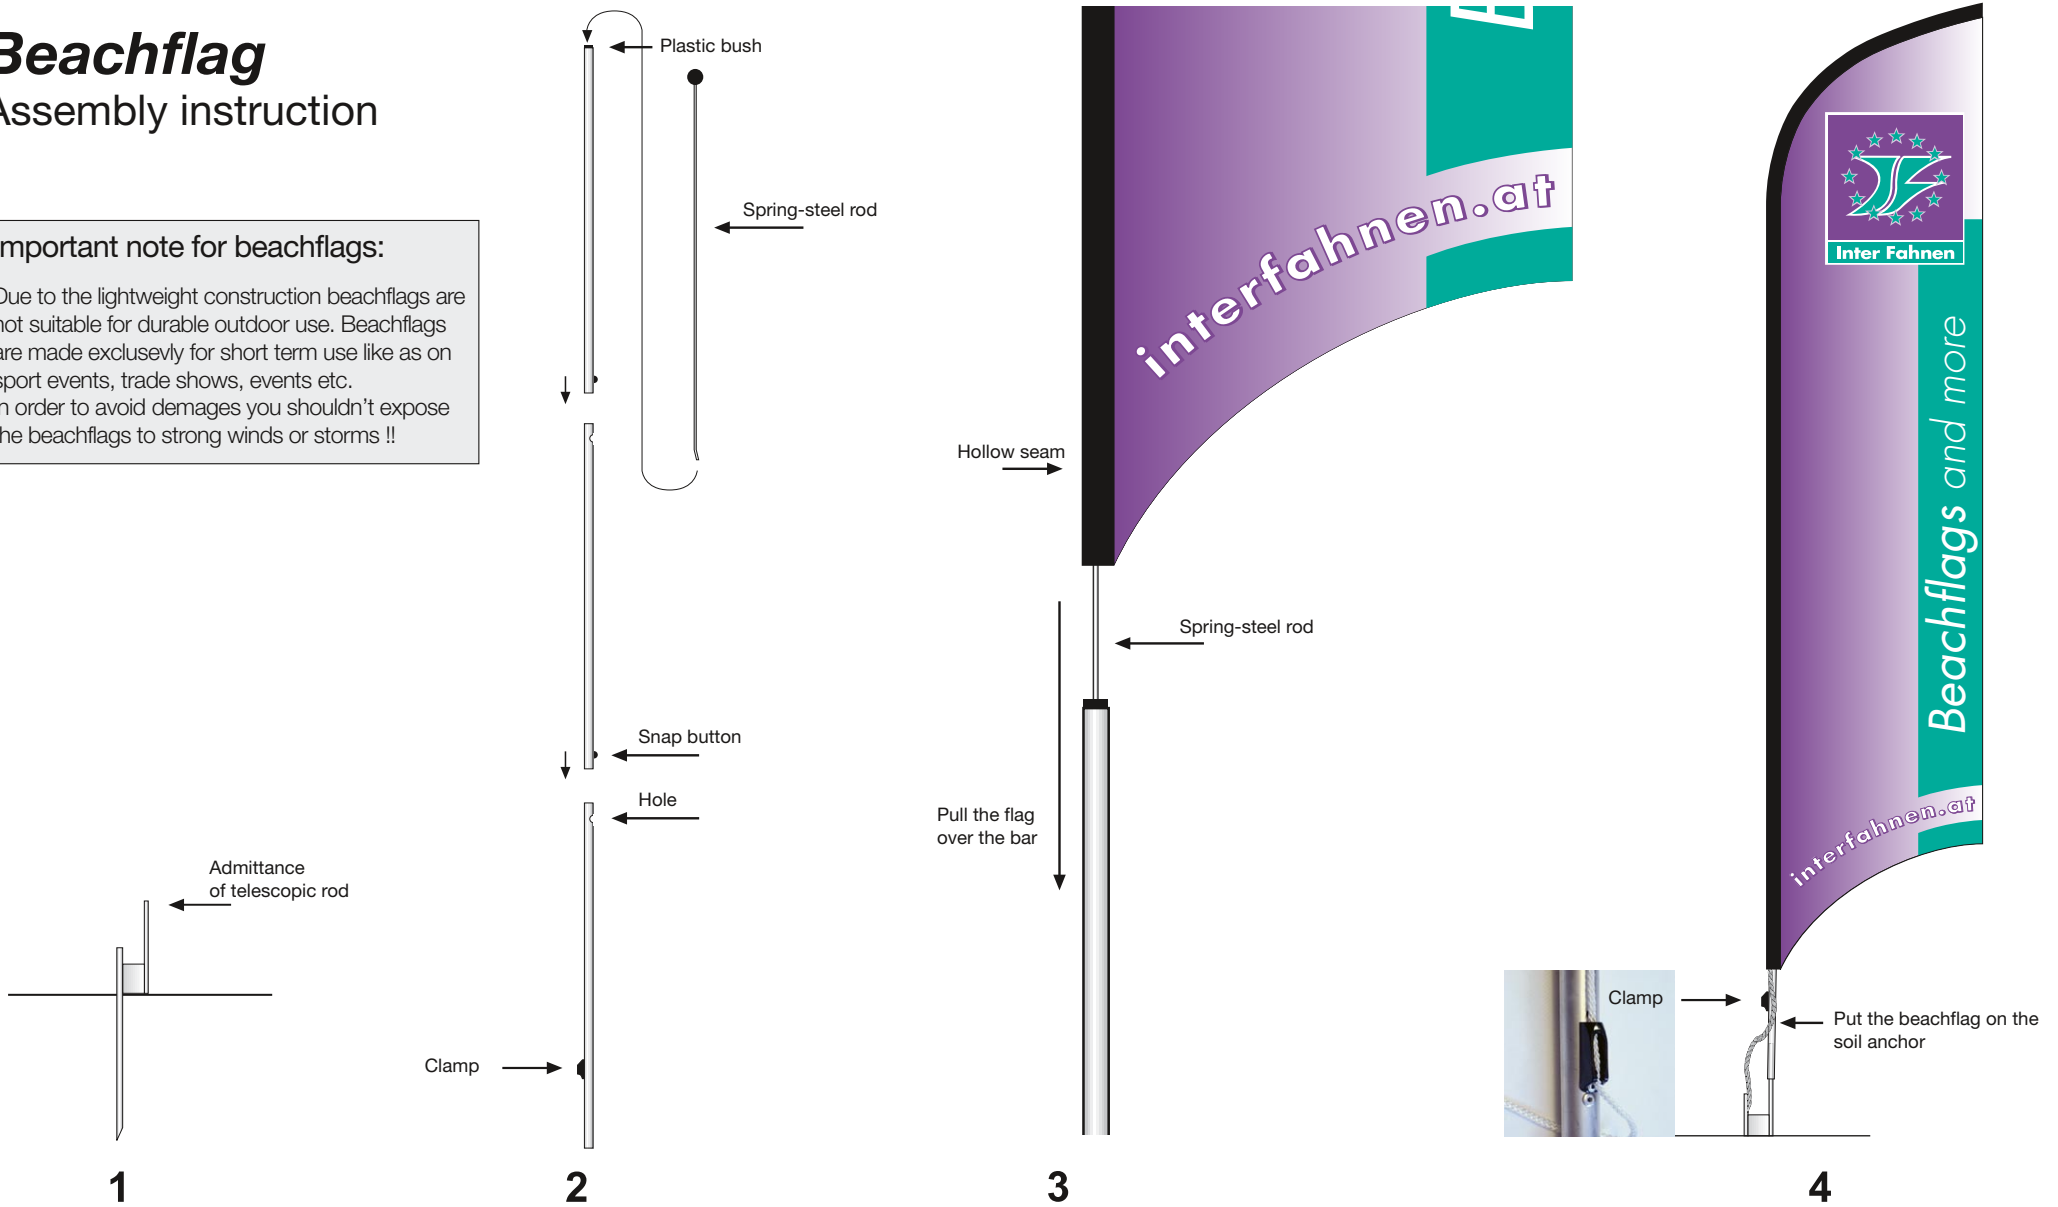

1. Knock or press the soil anchor in the soil

2. Take the aluminium pipes (depending upon format 2 or 3 pipes) and put these together to the tie-clips audibly engage. Put the end of the spring-steel rod firmly up to notice (approx. 10 cm ) into the plastic sleeve at the top of the linkage.

3. Take the linkage with the spring-steel rod in front and push it into the hollow seam of the flag.

4. **!! ATTENTION VERY IMPORTANT !!** Pull the flag completely downward to these the desired form have and fix the line of the flag into the clamp on the telescopic rod, please see to it that the line does not become strained by force, it will be sufficient already an easy tension for a perfect optics and functionality.